

CONTROL BOXES

JCB35E

FEATURES




- Connection of max 6 actuators and 2 operating elements
- Built-in backup battery function option and IPX4
- Medically approved according to EN60601-1 / UL60601-1



SPECIFICATIONS

| | | | |
|----------------------------|---|---------------------|---|
| Number of actuator outputs | 1-6 outputs | Fuse | Can be changed from outer side |
| Output Voltage (VDC) | 24/29 | Cable length | 3m |
| Input Voltage (VAC) | 110 or 230 | IP Grade | IP54 |
| Transformer power (Watts) | 86/150/200/360 | Ambient temperature | +5°C ~ +40 °C |
| Actuator plugs | 4s/6s (see page 56) | Standard | UL60601-1 / CE |
| Hand/Foot-Control plugs | 9s/13s (see page 56) | Optional Features | Back-up battery, 1.3Ah/24V, charger built-in (JCB35EA) |
| Power plug | Option (see page 56) | | Customized intelligent function with microchips built-in option (JCB35EM) |
| Colour | Black or Grey | | Battery and customized function together (JCB35EMA) |
| Duty cycle | 10%, max 2min. continuous use | | |
| Overload protection | For all channels (single-extra protected or combined-extra protected), Option (see page 07) | | |

DIMENSIONS

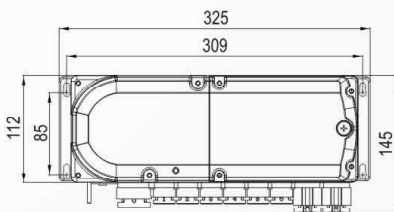

ORDER KEY EXAMPLE

JCB35E - 4 - 24 - 230 - 86 - 4b - 9b - EF - G - X

- ▶ Only if special option ★
- ▶ Colour (G: grey, B: black)
- ▶ Power plug (see page 56)
- ▶ Hand/Foot-Control plugs (see page 56)
- ▶ Actuator plugs (see page 56)
- ▶ Transformer power (Watts)
- ▶ Input voltage (VAC)
- ▶ Output voltage (VDC)
- ▶ Number of actuator outputs
- ▶ Type (JCB35E, JCB35EM, JCB35EA, JCB35EMA)

- ★
- C3 JIECANG standard 3 -column bed system
- A Customized function